# 275/PL 500F



### FIXED BOLLARDS WITH COUNTERFRAME

The fixed 275/PL 500F PILOMAT have been designed and built with architectural appearence similar to that of the retractable PILOMAT bollards and therefore also allows the combined use of both versions.

Current models are the result of our 40 years'experience in the security field and in excess of 20 years in the specific design and manufacture of bollards.

### **GENERAL FEATURES**

The fixed PILOMAT bollards are used in public or private areas in order to define or prevent the parking of vehicles, for preventing access to vehicles in pedestrian areas. These items, with a counterframe to wall, in addition to the architectural appearance of the automatic PILOMAT, allow the removal of the bollard in the event of such a removal being needed, or if impact has occurred.







275/PL 500F\_DATASHEET.19 REVIEW 23/09/2019

# 275/PL 500F



#### **AVAILABLE ITEMS**

PILOMAT BOLLARD 275/PL 500FFEV - NORMAL STEEL PAINTED

PILOMAT BOLLARD 275/PL 500FIXV - STAINLESS STEEL PAINTED

PILOMAT BOLLARD 275/PL 500FIXS - STAINLESS STEEL BRUSHED

RIBS ON FIXED CYLINDER

HEAD WITHOUT LOGO FOR PILOMAT 275/PL 500F

REFLECTING ADHESIVE STRIP- WHITE (NO LOGO)


MULTILED FLASHING LIGHT - 8 LED POINTS


MULTILED FLASHING LIGHT - 25 LED POINTS

FLASHING LIGHT POWER CIRCUIT FOR FIXED BOLLARDS (MAX. 4 BOLLARDS)


PAINTING WITH RAL COLOUR ON REQUEST

KIT ANTI-TEMPERING SCREWS FOR CROWN - REMOVAL KEY





FIXED CYLINDER	S235JR NORMAL STEEL - X5CrNi 18-10 (AISI 304) STAINLESS STEEL X5CrNiMo 17-12-2 (AISI 316) STAINLESS STEEL
FIXED CYLINDER DIAMETER	273mm
FIXED CYLINDER HEIGHT	500mm
FIXED CYLINDER NORMAL STEEL THICKNESS	6mm
FIXED CYLINDER STAINLESS STEEL THICKNESS	AISI 304: 6mm - AISI 316: 4mm
FIXED CYLINDER NORMAL STEEL FINISH	ANTI-CORROSION TREATMENT - STANDARD PAINTING GREY ANTHRACITE
FIXED CYLINDER STAINLESS STEEL FINISH	AS ABOVE OR BRUSHED
REFLECTING ADHESIVE STRIP	YES - HEIGHT 55mm
PROTECTION CLASS	IP67
IMPACT RESISTANCE (WITHOUT DEFORMATION)	40.000 J
BREAKOUT RESISTANCE	250.000 J
BRACKETS INCLUDED	YES - 4 BRACKETS
CONNECTION LINE FOR FLASHING LIGHT	STANDARD 10m (MAX. LENGTH 80m)

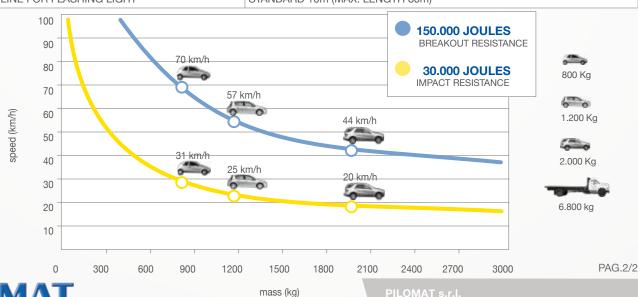



275/PL 500F DATASHEET.19 REVIEW 23/09/2019